


# EBL-100 Electric Bolt

## Specification

Model	<b>EBL-100</b>
Faceplate	Rectangular-shaped
Control Mode	Fail safe (NC), power to lock
Faceplate Material	Aluminum
Armature Plate Material	Stainless steel
Application	Outswing door, Inswing door and Double swing door
Input Port	Exit Button x 1
Status Output	Door lock / Sensor
Relock Time Delay	0, 2.5, 5 seconds
Power Input	DV 12V/24V
Dimension (mm)	Lock: 200 (L) x 34 (W) x 43 (H) Armature plate: 210 (L) x 42 (W) x 0.8 (H)
Weight	900g
U Bracket for Glass Door (Option)	UG-200 / UG-201 / UG-202

## Door Installation

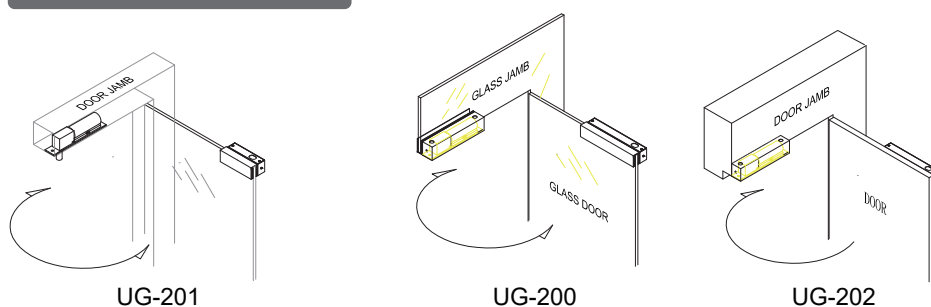

# JEB-220 Mini Electric Bolt

## Specification

Model	<b>JEB-220</b>
Control Mode	Fail safe (NC); detect the door position by the door magnetic spring to lock the door.
Lock Bolt Material	Stainless steel
Application	Door, Deposit box, or Cabinet
Status Output	Alarm / Controller
Relock Time Delay	Set by DIP switch, automatic locking time 0, 3, 6, 9 seconds (applicable to 180 degrees two-way access door)
Power Input	DV 12V/1A
Dimension (mm)	Lock: 150 (L) x 22 (W) x 31 (H) Magnet fixed plate: 85 (L) x 22 (W) x 10 (H)
U Bracket (Option)	UBK-220U